


# DIRT OVAL KARTING

| ITEM NUMBER                                                               | TIRE SIZE    | TREAD PATTERN    | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND COMPARISON SOFT TO FIRM |
|---------------------------------------------------------------------------|--------------|------------------|-------------|--------------|---------------|------------------|--------------------|---------------|----------------------------------|
| <b>DIRT OVAL KART TIRES - Soft, Wet, Tacky Track</b>                      |              |                  |             |              |               |                  |                    |               |                                  |
| 11325                                                                     | 10.5 x 5.0-6 | Slick            | 4.75"       | 10.5"        | 32.75"        | 6.5"             | 6.5"               | 6.63"         | D10A, D20A, D30A                 |
| 11600                                                                     | 11.0 x 6.0-6 | Slick            | 6.0"        | 11.0"        | 33.0"         | 8.25-8.5"        | 8.5"               | 8.5"          | D10A, D20A, D30A                 |
| 11800                                                                     | 11.0 x 8.0-6 | Slick Right Side | 7.5"        | 11.0"        | 34.0"         | 10.0"            | 10.0"              | 10.13"        | D10A, D20A, D30A                 |
| <b>DIRT OVAL KART TIRES - Intermediate/Transitioning Track Conditions</b> |              |                  |             |              |               |                  |                    |               |                                  |
| 15500                                                                     | 10.5 x 5.0-6 | Slick            | 4.75"       | 10.5"        | 32.75"        | 6.5"             | 6.5"               | 6.625"        | A40                              |
| 15600                                                                     | 11.0 x 6.0-6 | Slick            | 6.0"        | 11.0"        | 33.0"         | 8.25-8.5"        | 8.5"               | 8.5"          | A40                              |
| 15800                                                                     | 11.0 x 8.0-6 | Slick Right Side | 7.5"        | 11.0"        | 34.0"         | 10.0"            | 10.0"              | 10.125"       | A40                              |
| <b>DIRT OVAL KART TIRES - Hard Track Conditions</b>                       |              |                  |             |              |               |                  |                    |               |                                  |
| 15456                                                                     | 10.5 x 4.5-6 | Slick            | 4.75"       | 10.5"        | 32.5"         | 6.5"             | 6.5"               | 6.6"          | FK                               |
| 15600                                                                     | 11.0 x 6.0-6 | Slick            | 6.0"        | 11.0"        | 33.0"         | 8.25-8.5"        | 8.5"               | 8.5"          | FK                               |
| 15910                                                                     | 11.0 x 9.0-6 | Slick Right Side | 9.0"        | 11.0"        | 33.0"         | 10.0"            | 10.0"              | 10.125"       | FKSE                             |
| SOFT                                                                      |              |                  |             |              |               |                  |                    |               | FIRM                             |
|                                                                           | D10A         | D20A             | D30A        | A40          | FK/FKSE       |                  |                    |               |                                  |

# TREADED KART

| ITEM NUMBER | TIRE SIZE    | TREAD PATTERN | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND COMPARISON SOFT TO FIRM |
|-------------|--------------|---------------|-------------|--------------|---------------|------------------|--------------------|---------------|----------------------------------|
| 11505       | 5.0/10.5-6   | Treaded Dirt  | 4.5"        | 10.5"        | 33.75"        | 5"               | 5.0"               | 5.75"         | D30A                             |
| 11850       | 11.5 x 8.0-6 | Treaded CB    | 8.0"        | 11.0"        | 36.0"         | 9-10"            | 10.0"              | 9.5"          | D10A, D20A, D30A, D50A           |
| 11900       | 11.0 x 5.5-6 | Treaded CAB   | 5.5"        | 11.0"        | 34.5"         | 6-6.5"           | 6.0"               | 6.375"        | D10A, D20A, D30A                 |
| 11901       | 11.0 x 5.5-6 | Treaded CAB   | 5.5"        | 11.0"        | 35.75"        | 5.5"             | 5.5"               | 6.375"        | RACE SAVER                       |
| 11920       | 11.0 x 6.5-6 | Treaded CAB   | 6.5"        | 11.0"        | 35.5"         | 6.5-8"           | 6.5"               | 7.125"        | D10A, D20A, D30A                 |
| 11939       | 12.0 x 8.0-6 | Treaded CB    | 8.0"        | 12.0"        | 38.5"         | 6.5"             | 6.5"               | 9.25"         | RACE SAVER                       |
| 11940       | 12.0 x 8.0-6 | Treaded CB    | 8.0"        | 12.0"        | 37.5"         | 9-10"            | 10.0"              | 9.75"         | D10A, D20A, D30A                 |
| 11941       | 12.0 x 8.0-6 | Treaded CB    | 8.0"        | 12.0"        | 37.5"         | 9-10"            | 10.0"              | 9.75"         | D50A                             |
| 11950       | 11.5 x 9.0-6 | Treaded CB    | 9.0"        | 12.0"        | 37.0"         | 9-10"            | 10.0"              | 10.25"        | D10A, D20A, D30A                 |
| 11960       | 12.0 x 9.0-6 | Treaded CB    | 9.0"        | 12.0"        | 38.5"         | 9-10"            | 10.0"              | 10.25"        | D10A, D20A, D30A                 |
| 11970       | 12.0 x 9.0-6 | Treaded CB    | 9.0"        | 12.0"        | 38.5"         | 9-10"            | 10.0"              | 10.25"        | D50A                             |
| SOFT        |              |               |             |              |               |                  |                    |               | FIRM                             |
|             | D10A         | D20A          | D30A        |              |               |                  | D50A               |               | RACE SAVER                       |

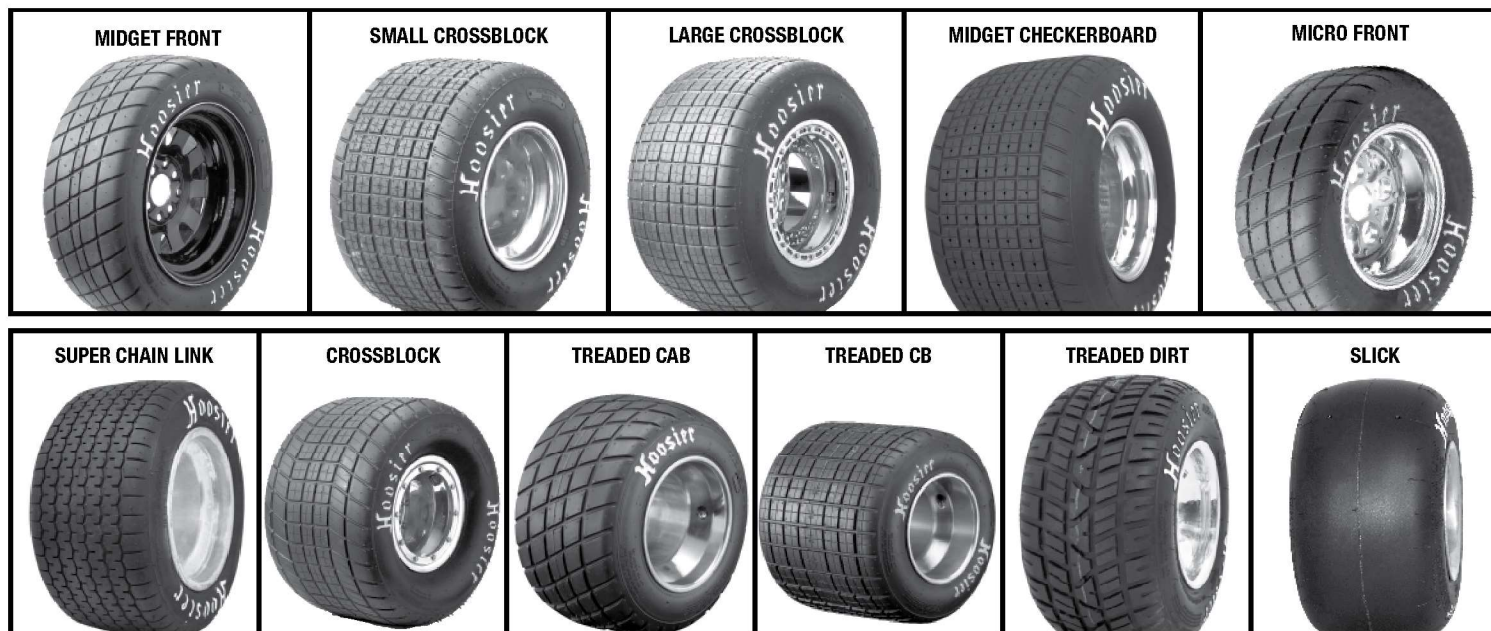

## ASPHALT OVAL KARTING

| ITEM<br>NUMBER | TIRE SIZE    | TREAD<br>PATTERN | TREAD<br>WIDTH | APPROX.<br>DIA. | APPROX.<br>CIRC. | RECOM.<br>RIM WIDTH | MEASURED<br>RIM WIDTH | SECTION<br>WIDTH | COMPOUND COMPARISON<br>SOFT TO FIRM |
|----------------|--------------|------------------|----------------|-----------------|------------------|---------------------|-----------------------|------------------|-------------------------------------|
| 15500          | 10.5 x 5.0-6 | Slick            | 4.50"          | 10.5"           | 33.125"          | 6-6.5"              | 6.0"                  | 6.25"            | A40                                 |
| 15656          | 11.0 x 6.5-6 | Slick            | 6.25"          | 11.0"           | 34.75"           | 8-9"                | 8.5"                  | 8.625"           | A40                                 |
| 15600          | 11.0 x 6.0-6 | Slick            | 6.0"           | 11.0"           | 33.0"            | 8.25-8.5"           | 8.5"                  | 8.5"             | A40                                 |
| 15800          | 11.0 x 8.0-6 | Slick            | 7.875"         | 11.0"           | 34.0"            | 10"                 | 10.0"                 | 9.75"            | A40                                 |
| SOFT           |              |                  |                |                 |                  | A40                 |                       |                  | FIRM                                |
| A40            |              |                  |                |                 |                  |                     |                       |                  |                                     |

## ASPHALT QUARTER MIDGET

| ITEM<br>NUMBER | TIRE SIZE      | TREAD<br>PATTERN | TREAD<br>WIDTH | APPROX.<br>DIA. | APPROX.<br>CIRC. | RECOM.<br>RIM WIDTH | MEASURED<br>RIM WIDTH | SECTION<br>WIDTH | COMPOUND COMPARISON<br>SOFT TO FIRM |      |
|----------------|----------------|------------------|----------------|-----------------|------------------|---------------------|-----------------------|------------------|-------------------------------------|------|
| 15031          | 31.0/4.5-5     | Slick            | 4.5"           | 10.25"          | 31.0"            | 5-6"                | 5.5"                  | 5.5"             | A35                                 |      |
| 15032          | 32.0/4.5-5     | Slick            | 4.5"           | 10.25"          | 32.0"            | 5-6"                | 5.5"                  | 5.5"             | A35                                 |      |
| 15033          | 32.0/4.5-5 SH  | Slick            | 4.5"           | 10.25"          | 31.5"            | 5-6"                | 5.5"                  | 5.5"             | A35                                 |      |
| 15042          | 32.0/4.5-5     | Slick            | 4.5"           | 10.25"          | 32.0"            | 5-6"                | 5.5"                  | 5.5"             | R50                                 |      |
| USAC / QMA     | .25 MIDGET     | POSITION         |                |                 |                  |                     |                       |                  |                                     |      |
| 15325          | 33.0/5.0-6 NY1 | Right Front      | 4.5"           | 10.5"           | 33.125"          | 6-6.5"              | 6.0"                  | 6.25"            | A35                                 |      |
| 15650          | 34.5/6.5-6 NY1 | Right Rear       | 6.0"           | 11.0"           | 34.50"           | 8-8.5"              | 8.5"                  | 8.25"            | A35                                 |      |
| SOFT           |                |                  |                |                 |                  |                     |                       |                  |                                     | FIRM |
|                | D10            | D20A             | D30            |                 |                  | RD40                | A35/R50               |                  |                                     |      |

## DIRT QUARTER MIDGET

| ITEM<br>NUMBER | TIRE SIZE     | TREAD<br>PATTERN | TREAD<br>WIDTH | APPROX.<br>DIA. | APPROX.<br>CIRC. | RECOM.<br>RIM WIDTH | MEASURED<br>RIM WIDTH | SECTION<br>WIDTH | COMPOUND COMPARISON<br>SOFT TO FIRM |
|----------------|---------------|------------------|----------------|-----------------|------------------|---------------------|-----------------------|------------------|-------------------------------------|
| 11031          | 31.0/4.5-5    | Slick            | 4.5"           | 10.0"           | 31.0"            | 5-6"                | 5.5"                  | 5.5"             | D10, D20A                           |
| 11032          | 32.0/4.5-5    | Slick            | 4.5"           | 10.25"          | 32.0"            | 5-6"                | 5.5"                  | 5.5"             | D10, D20A, RD40                     |
| 11033          | 32.0/4.5-5 SH | Slick            | 4.5"           | 10.25"          | 31.5"            | 5-6"                | 5.5"                  | 5.5"             | D20A                                |
| 11325          | 10.5 x 5.0-6  | Slick            | 4.5"           | 10.5"           | 33.125"          | 6-6.5"              | 6.0"                  | 6.25"            | D20A                                |
| 11650          | 11.5 x 6.5-6  | Slick            | 6.25"          | 11.5"           | 34.5"            | 8-8.5"              | 8.5"                  | 8.25"            | D20A                                |
| USAC.25 MIDGET |               | POSITION         |                |                 |                  |                     |                       |                  |                                     |
| 11175          | 33.0/5.0-6    | Right Front      | 4.5"           | 10.5"           | 33.125           | 6-6.5"              | 6.0"                  | 6.25"            | D10, D30                            |
| 11225          | 34.5/6.5-6    | Right Rear       | 6.25"          | 11.0"           | 34.5"            | 8-8.5"              | 8.5"                  | 8.25"            | D10, D30                            |
| SOFT           |               |                  | FIRM           |                 |                  |                     |                       |                  |                                     |
| D10            |               |                  | D20A           |                 |                  | D30                 |                       |                  | RD40                                |

## 5" SPRINT / SOLO KART

| ITEM NUMBER | TIRE SIZE  | TREAD PATTERN | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND COMPARISON<br>SOFT TO FIRM |
|-------------|------------|---------------|-------------|--------------|---------------|------------------|--------------------|---------------|-------------------------------------|
| 22149       | 4.5/10.0-5 | Slick         | 4.25"       | 10.0"        | 32.0"         | 5.0-5.5"         | 5.0"               | 5.5"          | R55                                 |
| 22150       | 4.5/10.0-5 | Slick         | 4.25"       | 10.0"        | 32.0"         | 5.0-5.5"         | 5.0"               | 5.5"          | R60A, R60B                          |
| 22155       | 4.5/10.0-5 | Slick         | 4.25"       | 10.0"        | 32.0"         | 5.0-5.5"         | 5.0"               | 5.5"          | R70                                 |
| 22180       | 4.5/10.0-5 | Slick         | 4.25"       | 10.0"        | 32.0"         | 5.0-5.5"         | 5.0"               | 5.5"          | R80                                 |
| 22250       | 6.0/11.0-5 | Slick         | 5.5"        | 11.0"        | 34.0"         | 7.0-7.25"        | 7.0"               | 7.25"         | R60A, R60B                          |
| 22260       | 6.0/11.0-5 | Slick         | 5.5"        | 11.0"        | 34.0"         | 7.0-7.25"        | 7.0"               | 7.25"         | R70, R80                            |
| 22368       | 7.1/11.0-5 | Slick         | 6.375"      | 11.0"        | 34.0"         | 8.0-8.25"        | 8.25"              | 8.5"          | R55                                 |
| 22371       | 7.1/11.0-5 | Slick         | 6.375"      | 11.0"        | 34.0"         | 8.0-8.25"        | 8.25"              | 8.5"          | R60A, R60B                          |
| 22380       | 7.1/11.0-5 | Slick         | 6.375"      | 11.0"        | 34.0"         | 8.0-8.25"        | 8.25"              | 8.5"          | R70, R80                            |
| 22405       | 4.5/10.0-5 | Rain Front    | 4.25"       | 10.0"        | 32.25"        | 4.75"            | 4.75"              | 5.25"         | WET                                 |
| 22435       | 6.0/11.0-5 | Rain Rear     | 5.5"        | 11.0"        | 34.5"         | 6.75"            | 6.75"              | 7.25"         | WET                                 |
| SOFT        |            |               |             |              |               |                  |                    |               | FIRM                                |
|             |            | WET           |             | R55          | R60A          | R60B             |                    | R70           | R80                                 |

# SUPER KART & ENDURO

| ITEM<br>NUMBER | TIRE SIZE         | TREAD<br>PATTERN | TREAD<br>WIDTH | APPROX.<br>DIA. | APPROX.<br>CIRC. | RECOM.<br>RIM WIDTH | MEASURED<br>RIM WIDTH | SECTION<br>WIDTH | COMPOUND COMPARISON<br>SOFT TO FIRM |
|----------------|-------------------|------------------|----------------|-----------------|------------------|---------------------|-----------------------|------------------|-------------------------------------|
| 22460          | 4.6/10.5-6        | Slick            | 4.375"         | 10.5"           | 33.0"            | 5.0-6.0"            | 5.0"                  | 5.5"             | R60B, R60                           |
| 22505          | 5.0/10.5-6 W3 CIK | Rain-Front       | 4.5"           | 10.5"           | 33.75"           | 4.75"               | 4.75"                 | 5.75"            | W3                                  |
| 22550          | 5.5/11.0-6 SK CIK | Slick            | 5.125"         | 11.0"           | 35.0"            | 4.75-6.0"           | 4.75"                 | 5.75"            | R60B SK                             |
| 22650          | 6.5/11.0-6        | Slick            | 6.25"          | 11.0"           | 34.75"           | 7.0-8.0"            | 8.0"                  | 8.1"             | R60B                                |
| 22710          | 7.1/11.5-6 W3 CIK | Rain-Rear        | 6.75"          | 11.5"           | 35.875"          | 8.0"                | 8.0"                  | 8.25"            | W3                                  |
| 22800          | 8.0/11.5-6 SK CIK | Slick            | 7.0"           | 11.5"           | 35.875"          | 8.0-9.0"            | 8.0"                  | 8.25"            | R60B SK                             |
| SOFT           |                   | WET              |                | R60B            |                  | R60                 |                       | FIRM             |                                     |

